

INFRARED ELEMENTS IN CERAMIC HFE

- HALF FLAT ELEMENT

Properties

The standard range of ceramic infrared elements in stock are used in a wide range of industrial and engineering applications such as thermoforming, packaging, paint curing, printing, drying, gluing, sterilisation, roasting etc.

They are also very effectively in infrared outdoor heaters and saunas.

Most plastics and many other materials absorb infrared best in wavelength 2-10 μm , which makes the ceramic heater the most popular radiant emitter on the market.

The solid cast heater body is flat, producing a diffuse radiant output to target distance in some applications.




Technical specification

Material	Ceramic solid body in white glaze colour with an embedded high temperature resistance wire wire
Heater voltage	230 V
Operating temperature	Max permissible 750°C
Useful wave-length range	2 to 10 μm (microns) long wavelength
Dimensions	122x60x26 mm
Average weight	105 g
Electric connection	100 mm ceramic beaded power leads
Assembly	Recommended radiation distance from heater is 100 mm to 200 mm Mounting slot size oval 15x42 mm Steel wave spring and clip set included
Average operating life	Up to 20 000 hrs depending on conditions
Standards	CE , UL-499


Standard assortment

Model HFE	Power W	Mean surface temperature °C	Max power density kW/m ²	Article no
HFE 125	125	351	15	3054140125
HFE 150	150	405	18	3054140150
HFE 250	250	515	30	3054140250
HFE 325	325	596	39	3054140325
HFE 400	400	640	48	3054140400
HFE 500	500	726	60	3054140500

INFRARED ELEMENTS IN CERAMIC HFE - HALF FLAT ELEMENT

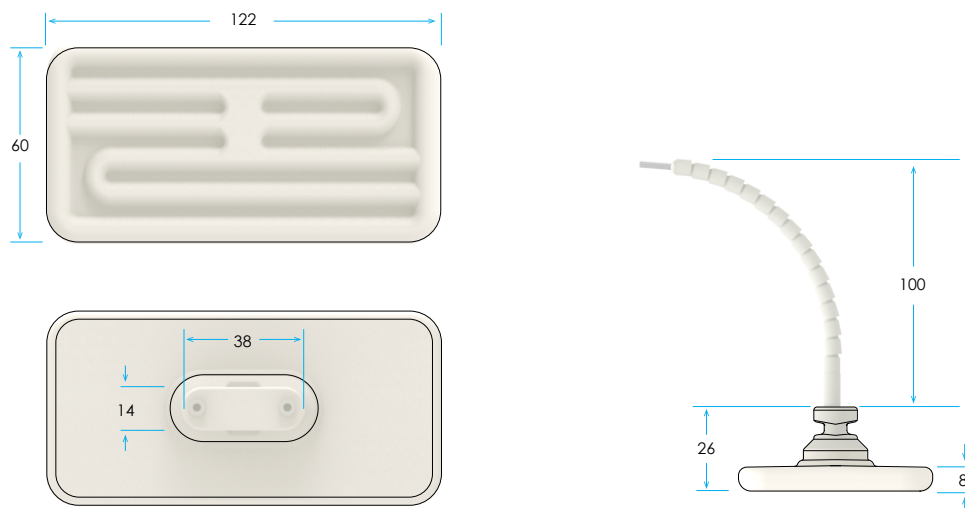

Heat up - Cool down curves

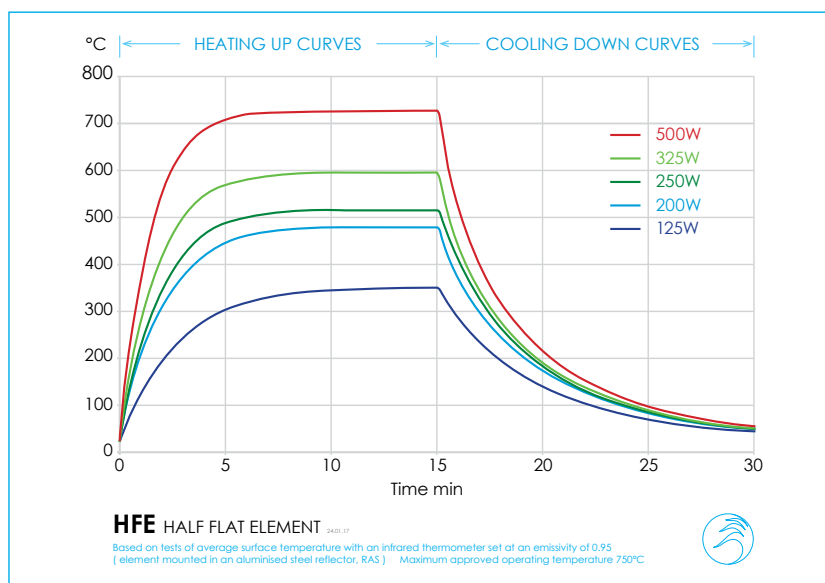

Options

Reflector of aluminised steel type RAS 0.5 article no 3050018100
 High temperature NPC cable and ceramic terminal blocks, different options
 Mounting bracket article no 3009010301
 Stainless steel bus bars 8x2x1000 mm article no 3005020305
 Other voltages, wattages, lead lengths and ceramic glaze colours available on request