

PTC HEATING ELEMENT B34-96-3

Properties

Backer standard range of PTC – Positive Temperature Coefficient heating elements in stock are designed for heating of forced air to be used in a wide range of engineering and domestic applications such as fan heaters, dehumidifiers, hot air curtains, tumble dryers, drying units, hand dryers, cabinet heaters etc.

The PTC heating technology offers several advantages compared to conventional resistance heaters e.g. rapid heating with selfregulating temperature control, uniform heating without power variation, compact design, no risk for overheating, economic installation, long life-time etc.

The element consists of PTC-chip and aluminium fins assembled by brazing and gluing in a heat resistant plastic frame that gives both technical and commercial advantages compared to mechanically assembled PTC elements.






Technical specification

Material	Ceramic PTC-chip BaTiO_3 , fins in aluminium, adhesive and coating in silicone, frame in PPS R7 plastic
Rated voltage	230 Vac $\pm 15\%$
Rated power	820W $\pm 10\%$ @ 48m ³ /h, 25°C
Voltage resistance	360 Vac/1 min
I_{inrush}	< 16A
T_{curie}	220 $\pm 7^\circ\text{C}$
R25	50-250 Ω at 25°C
Dimensions	120x53x22/16 mm
Electric connection	Tab terminal 6.4 ± 0.1 mm


Standard assortment

Article No

3050230901




PTC HEATING ELEMENT B34-96-3

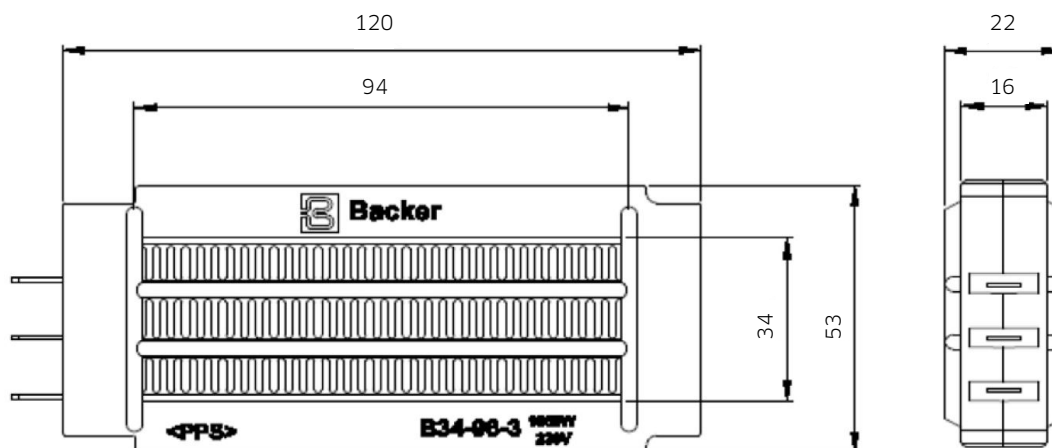

Circuit diagram/connection alternatives*

Electrical connection

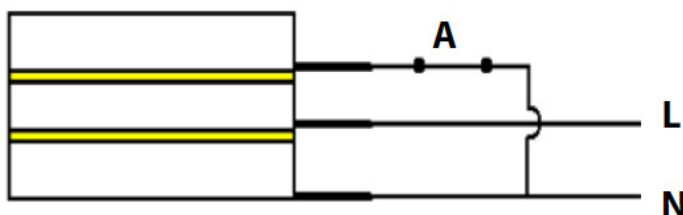

Alternative power output of the element when connected to a power supply:

A closed	1/1 power
A open	~1/2 power

All electric connections and energizing components, must be done by a qualified electrician.

Options available on request

Other voltages, wattages, temperatures and performances
PTC heating elements for contact, liquid and gas heating
High voltage insulated PTC customized heating systems with control system for vehicles
UL-approved PTC heating elements